

CATEGORY WISE COST OF SERVICE STUDY FOR MADHYA GUJARAT VIJ COMPANY LIMITED

PREPARED BY:



**MADHYA GUJARAT VIJ COMPANY LIMITED,
VADODARA**

JANUARY, 2020

TABLE OF CONTENTS

1 Background 4

2 Objectives 5

3 Basic Methodology 6

3.1 Classification of Costs: 6

3.2 Allocation of Costs: 6

3.3 Approach for segregation of cost: 6

3.4 Basis for Determination of Cost of Service 7

4 Definitions 9

4.1 System Peak Demand (Restricted) 9

4.2 Co-incident Peak Demand 9

4.3 Non-Coincident Peak Demand 9

4.4 Connected Load 9

4.5 Contracted Demand 9

4.6 System Load Factor 9

4.7 Category Load Factor 9

4.8 Diversity Factor 9

5 Classification of Expenses 10

5.1 Classification of Power Purchase Expenses 10

5.2 Classification of Other Distribution Expenses 10

6 Allocation of Demand Related Costs 12

6.1 Range of Methods 12

6.2 Choice of Methods 13

6.2.1 Demand related power purchase costs 13

6.2.2 Demand related other distribution costs 14

6.2.3 Demand related Total Distribution costs 15

7 Allocation of Energy Related Costs 16

7.1 Allocation of Losses 16

7.2 Allocation of Energy Related Costs 18

8 Allocation of Consumer Related Costs 20

8.1 Category Wise Consumer Weightages 20

8.2 Allocation of Consumer Related Costs 20

9 Computation of category wise Cost of Service 22

10 Conclusion 24

11 Annexure 1– Category Wise Diversity Factors 25

12 Annexure 2– Category Wise Non-Coincident Demand 26

13 Annexure 3 – Cost of Service (+/- 20%) for FY 2018-19 27



LIST OF TABLES

Table 1– Classified Power Purchase Expenses	10
Table 2– Classified Distribution Expenses.....	11
Table 3– Category Wise Average & Excess Demand (MW)	13
Table 4 – Allocation Factors for Demand Related Power Purchase Costs.....	14
Table 5 – Allocation factors for Demand Related Other Distribution Costs	14
Table 6 – Allocation factors for Demand Related Total Distribution Costs	15
Table 7 – Losses at MGVCL.....	16
Table 8 – Allocation of Commercial Losses.....	17
Table 9 – Allocation of Technical Losses.....	17
Table 10 – Allocation of Losses to Categories.....	18
Table 11 – Allocation Factors for Energy Related Costs.....	18
Table 12 – Category Wise Consumer Weightage.....	20
Table 13 – Allocation Factors for Consumer Related Costs	20
Table 14 – Category Wise Total Cost of Service	22
Table 15 – Category Wise per Unit Cost of Service.....	23
Table 16 – Cost of Service against Average Realization	24
Table 17 – Sample Diversity Factors for LT Categories	25
Table 18 – Category Wise Non-Coincident Demand	26
Table 19 – Cost of Service (+/- 20%) for FY 2018-19	27



1 Background

With the advent of the Electricity Act 2003 and various policy initiatives thereof, it has now become mandatory for the Electrical utilities to gradually reduce the cross subsidy and move the tariffs in the State towards the “Cost of Supply”. Traditionally, in the Indian context, tariffs for domestic and agricultural consumers have been heavily subsidized either by the state through subsidies and subventions or through cross subsidization by other consumer categories, primarily by industrial and commercial category of consumers.

With the focus now shifting to cost- reflective tariffs, it has now become necessary for the distribution utility to compute the cost to serve for individual consumer categories and have a road map for gradual reduction of the cross subsidies existing between the consumer categories today. A basic principle that has been widely accepted in electricity sector regulations is that the tariffs for various categories of consumers should be, as far as practicable, equal to the costs imposed by that category of consumers on the system.

As per Section 61 (g) of Electricity (amendment) Act, 2007, “that the tariff progressively reflects the cost of supply of electricity and also, reduces cross-subsidies in the manner specified by the Appropriate Commission;”

The Electricity Act, 2003 (hereinafter referred to as “Act”) envisages non-discriminatory open access to transmission and distribution networks of the licensees. As per the Act, open access may be allowed before the cross subsidies are eliminated on payment of a surcharge in addition to the charges for transmission / wheeling of power as determined by the State Commission. The Act also envisages progressive reduction of cross subsidies in a manner as may be specified by the State Commission.

In relation this, Gujarat Urja Vikas Nigam Limited (GUVNL) has mandated ICRA Online Limited to conduct the cost of service study for each distribution company namely – Madhya Gujarat Vij Company Limited (MGVCL), Dakshin Gujarat Vij Company Limited (DGVCL), Paschim Gujarat Vij Company Limited (PGVCL), Uttar Gujarat Vij Company Limited (UGVCL) and also combined report of all the four Discoms. Accordingly, the present report covers the details pertaining to the cost of service for MGVCL.



2 Objectives

The primary objective of the Cost of service (CoS) study is to allocate costs of service of utility to individual consumer categories that distribution utility serves. Such allocation reflects the costs attributable to electricity supplied and other related services provided to categories. The costs allocated to the categories are then used as input to design tariff or to determine cross subsidy, if any. The determination of cost of service for each of the consumer category requires segregating the utility's costs into functions, services and categories.

In setting up of tariffs, some of the consumer categories which have been paying lower tariffs historically have been given cross-subsidies in order to counter the effect of price increase. In an attempt to make the power sector reforms successful, utilities need to develop a road map for gradually reducing and eventually phasing out cross-subsidies.

Objectives of the Cost of Service study:

- Formulate a long-term tariff strategy;
- Establish cross subsidy elimination path;
- Provide right signals for efficient use of energy;
- Provide price signals for rendering specific services especially in the competitive markets;
- Facilitate directed and transparent administration of subsidies to the deserving classes;

There is a need to rationalize the tariff of all subsidized categories of consumers in phased manner, such that the consumers who are enjoying subsidized tariffs for years accept the tariff increase supplemented with improved quality of supply. It will also have to be ensured that there is no disparity in quality & quantity of power supply amongst the consumers, including the subsidized category consumers. Consumers shall be liable to bear the cost of supply and the loss levels pertaining to the efficiency level of the respective consumer category only. Cost of Supply shall be determined on the actual cost to supply to each of the consumer class without considering any subsidies. Such determination of actual costs requires apportionment of a utility's costs to the various consumer categories it serves.

Therefore, to achieve the objectives, the Cost of Service Study needs to be carried out for the following purposes:

- To attribute costs to different categories of consumers based on how those consumers cause costs to the utility;
- To provide a comparison of the allocated costs with revenues from existing tariff;
- To illustrate the extent of existing cross-subsidization between consumer categories;

3 Basic Methodology

Usually, the traditional approach adopted for calculation of cost of supply is using the Embedded Cost Method. The embedded cost-based approach allocates the total revenue requirement to various categories of consumers based on an analysis of the embedded or historic costs of the utility. In such analysis, the revenue requirement is allocated to classes of service to fix tariff based on various allocation factors. The factors can be the contribution of classes to the peak demand, the energy purchased by each class as a percentage of total sales, the number of consumers in the class etc.

The advantage of the embedded cost approach is that embedded costs and allocation factors can be measured based on data that is recorded in the books of the utility.

Therefore, a systematic approach to the CoS study involves two steps of Classification and Allocation of costs to various consumer categories.

3.1 *Classification of Costs:*

3.1.1 The costs are classified as being demand, energy or consumer/service related. Such a classification is done on the basis of the cause of such costs, i.e., the costs which are triggered by peak demands imposed on the system are classified as “demand related”; those related to level of power purchase as “energy related” and those by number and type of consumers as “consumer related”.

3.2 *Allocation of Costs:*

3.2.1 The classified costs are then allocated to various consumer classes of the utility based on allocation factors derived from demand, consumption of energy and number of consumers. Such allocation helps in arriving at the cost of service for each consumer class.


3.3 *Approach for segregation of cost:*

3.3.1 Cost of service study may also be conducted using forecasts for costs, consumer data and load patterns. The cost of service so derived may provide an input into tariff design. Together with the desired level of tariffs for each category, cost of service can clearly define the level of subsidies required for each category and the system as a whole.

3.3.2 The methods for classification and allocation of costs are as varied as there are utilities each producing a different result. The fact that there is no set methodology requires careful selection and regular update of the same in line with the changing characteristics of the utility and objectives of the study.



Figure 1: Flow Chart for Cost of Service Study

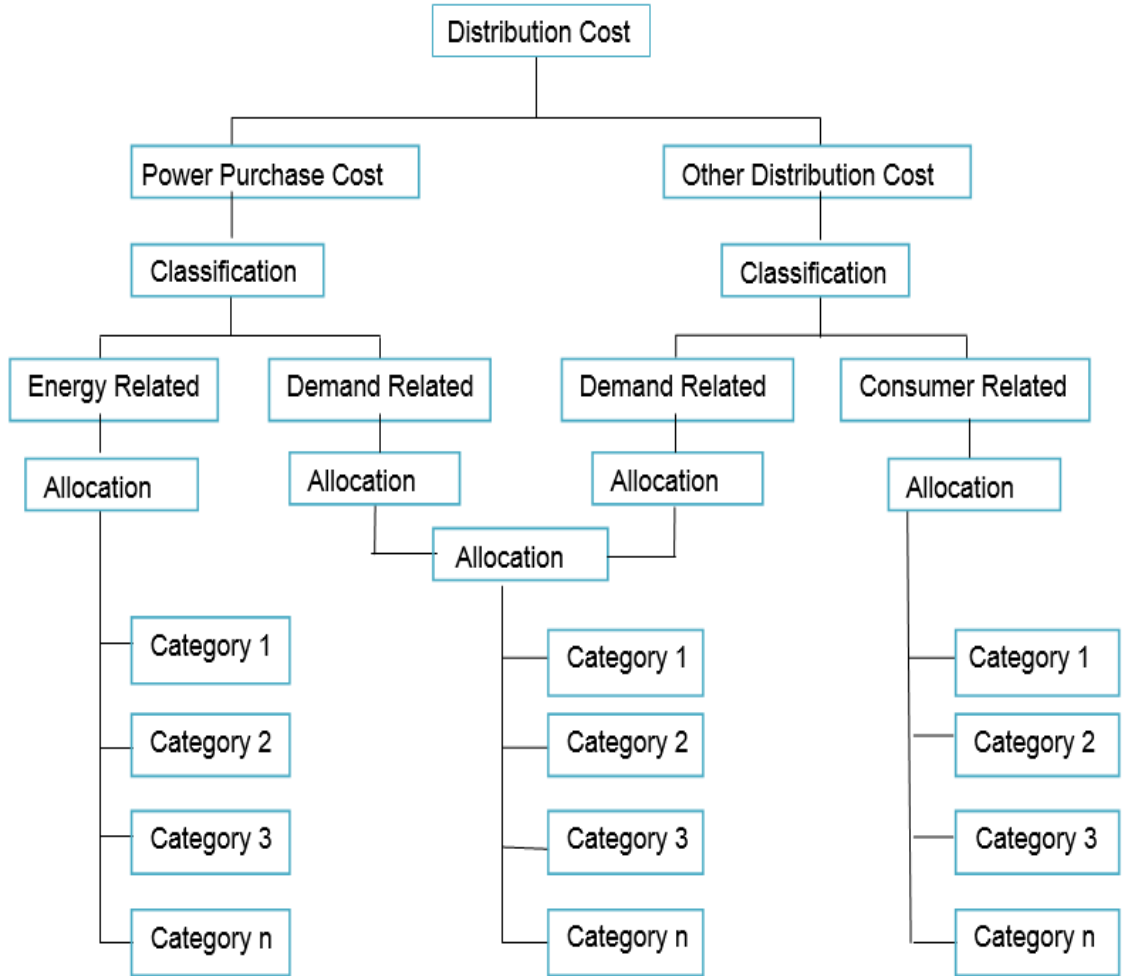

3.3.3 The total revenue from each of the consumer classes together with the cost of service so derived reflects upon the adequacy of current tariffs and the level of cross subsidies between classes existent in the utility's system.

3.4 Basis for Determination of Cost of Service

3.4.1 Costs for FY 2018-19

The ARR costs as per audited annual accounts of FY 2018-19, have been considered as the base for determination of category wise cost of service for MGVCCL. Such costs have been segregated into various heads of distribution costs to determine cost of supply of each category of consumers. It is submitted that during the determination of tariff, the Hon'ble Commission considers value of ARR which is worked out based on normative/actual parameters as per the MYT Regulations, 2016.

3.4.2 Category wise sales and revenue

The tariff categories wise sales have been grouped in the following categories:

1. Low Tension Categories
 - a. RGP

- b. GLP
 - c. Non RGP and LTMD
 - d. Streetlight
 - e. Irrigation Agricultural
 - f. Public Water Works and Sewerage Pumps
2. High Tension Categories
- a. Industrial High Voltage
 - b. Railway Traction

All the Low-Tension Tariff Categories were easily mapped to the above-mentioned low-tension categories. Amongst the high-tension categories, Railway Traction has been retained as a separate tariff category and all other categories have been clubbed under Industrial High Voltage category.

3.4.3 Distribution Losses

Distribution losses have also been bifurcated into technical and commercial losses.

Technical losses have been further bifurcated at HT and LT voltage levels.

Based on the above methodology, the cost and the losses are allocated to individual category of consumers and the cost of service for each of the category is worked out.

4 Definitions

4.1 *System Peak Demand (Restricted)*

Maximum demand (MW), in the utility's system, during a period measured as the sum of generation from all the sources.

4.2 *Co-incident Peak Demand*

Co-incident peak demand or contribution to system peak demand is the demand for a consumer category (Domestic, Industrial, etc.) occurring at the time of system peak demand. The sum of co-incident peak demands of all consumer categories is equal to the system peak demand.

4.3 *Non-Coincident Peak Demand*

Non co-incident peak demand is the peak demand for a category during a period. Such a peak may or may not occur at the time of system peak demand. Hence, the non-coincident peak demand may be greater than or equal to the co-incident peak demand for a category.

4.4 *Connected Load*

Connected load is the sum of all the electricity consuming items (Appliances, machines, motors, etc.) connected to the distribution system of the utility. Connected load may be defined for the entire system, a particular unit of the utility or for consumer categories.

4.5 *Contracted Demand*

Contracted demand is agreed upon by the buyer as the maximum demand that the buyer will have at any point in time during the contract period. The seller agrees to make power available to serve such demand.

4.6 *System Load Factor*

The ratio of the average demand to system peak demand, it is calculated as the ratio of total number of units consumed in the system during a period to that had the demand been at system peak throughout the same period.

4.7 *Category Load Factor*

The ratio of the average demand to non-coincident peak demand, it is calculated as the ratio of total number of units consumed by the category during a period to that had the category demand been at non co-incident peak throughout the same period.

4.8 *Diversity Factor*

Usually measured at the feeder level, it is defined to be the ratio of non-coincident peak to connected load for purpose of this study.



5 Classification of Expenses

Classification of costs involves identification of costs as demand related, energy related and consumer related, based on some notion of cost causation. Demand-related costs are those triggered by peak demands imposed on the system. Energy-related costs are related to the level of energy supplied. Consumer costs vary according to the number and type of consumers.

5.1 Classification of Power Purchase Expenses

Power purchase costs are identified to be energy as well as demand related as the utility should not only be able to supply the energy required over a period of time but must also install or purchase sufficient capacity to meet the peak demand of the system. The power purchase cost of MGVCCL comprises of fixed and variable charges which are taken in the ratio of 33:67 of the total power purchase cost.¹ The fixed cost is classified as demand related whereas the variable as energy related.

Table 1– Classified Power Purchase Expenses

Particulars	Power Purchase Cost	Demand Related	Energy Related	Customer Related
Power Purchase Cost				
- Fixed Cost	1,766	1,766	-	-
- Variable Cost	3,585	-	3,585	-
Classified Power Purchase Costs	5,351	1,766	3,585	-

5.2 Classification of Other Distribution Expenses

Other distribution costs are classified as either demand related or consumer related or a combination of the two. Other distribution costs related components like meters and Distribution assets that are used by a single consumer (e.g., Service Lines) could be classified as 100% consumer related. The costs associated with such items can also be classified as entirely consumer related.

Distribution costs other than those entirely consumer related may be classified using the following methods –

- 100% demand related approach classifies all other costs as entirely demand related on the rationale that distribution networks are set up to meet the local maximum demand.
- Partly demand and partly consumer related approach attempts to work out appropriate ratios for each component of distribution costs for classification into demand related and consumer related costs. The rationale for this approach is that the extent of distribution lines, especially in a Universal Service Obligation scenario, depends upon the location and number of consumers. Hence, a component of consumer related distribution cost exists.

¹ The power purchase is classified as demand and energy based on the structure of fixed charges and energy charges in power purchase bill of FY 2018-19.

The distribution system apart from serving the demand, also provides various services to the consumers such as metering, billing, break down repair etc. Hence, other distribution costs need to be classified as partly demand related and partly consumer related.

**Table 2– Classified Distribution Expenses
(Rs. in Crores)**

S. No	Particulars	MGVCL FY 2018- 19	Classification		
			Demand Related	Energy Related	Customer related
1	Repairs & Maintenance	42	21	-	21
2	Employee Costs	481	241	-	241
3	Administration & General Expenses	79	40	-	40
4	Depreciation & Related Debits (Net)	253	253	-	-
5	Interest & Financial charges	54	54	-	-
6	Other Debits	-	-	-	-
7	Extra-ordinary Items Debit/(Credit)	6	6	-	-
8	Tax	4	4	-	-
9	Net Prior Period Expenses/(Income)	-	-	-	-
10	Less: Expenses Capitalized	58	58	-	-
11	TOTAL EXPENDITURE (Sum (1 to 9) - 10)	862	561	-	301
12	Return on Equity	140	140	-	-
13	Less: Other Income	142	142	-	-
14	Classified Distribution Costs (11 + 12)	859	558	-	301

As can be seen from the above, the distribution costs such as repair and maintenance, employee cost & administrative and general expenses have been equally apportioned (50:50) into consumer related cost and demand related costs as these vary with the number and the type of consumer as well as with their demand. Rest of the distribution expenses are classified into demand related as they are only dependent on how much demand needs to be catered and not on number of consumers.

6 Allocation of Demand Related Costs

The choice for allocation criteria for demand related costs presents several options that may have significant impact on the cost allocation to various classes of consumers. The choice will depend upon data availability, characteristics of the utility and the objectives of the study. The following are the allocation criteria for demand related costs –

6.1 Range of Methods

6.1.1 Co-incident Peak Contribution²

The category coincident demand or contribution to the system peak demand may be defined as the demand in MW for each category of consumer that occurs at the time of the system's peak demand. The sum of all such demand for every consumer category plus losses will be equal to the peak demand of the system.

6.1.2 Non-Coincident Peak³

The non - coincident demand may be defined as the demand in MW for each category of consumer regardless of when it happens. This non-coincident demand will be greater than or equal to the category's contribution to the system's maximum demand. Thus, the sum of all such demand for every consumer category will be greater than the peak demand of the system.

6.1.3 Average and Excess

This method allocates demand related cost to the consumer category using factors that combine the category average demand and excess demand. Excess demand for a category is defined as –

$$\text{Category Excess Demand} = \text{Non-Coincident Demand} - \text{Average Demand}$$

The method uses two factors for allocation. The first component, or contribution to average, is the proportion of category's average demand to the system average demand times the system load factor.

$$\text{Contribution to Average} = (\text{Category Average Demand} / \text{System Average Demand}) * \text{System Load Factor}$$

The second component, or contribution to excess, reflects the proportion of the excess demand (non-coincident peak demand minus the average demand) of the category to the sum of excess demand of all categories. The advantage of the said approach is that coincident peak demand for a category is not required.

² Coincident Peak Demand for each category – MGVCCL serves the customers through feeders with mixed load, i.e., a feeder may serve customers from various categories. Such a situation makes it difficult to determine Coincident peak demand (Contribution to system peak demand).

³ Non-coincident peak demand can be estimated applying the diversity factor to the connected load for each category. Calculations are provided in Annexure 2.



$$\text{Contribution to Excess} = (\text{Category Excess Demand} / \sum \text{Category Excess Demand}) * (1 - \text{System Load Factor})$$

6.2 Choice of Methods

All energy related costs have been allocated based on the category -wise energy consumption. All consumer related costs have been allocated based on number of consumers with category wise weights. The appropriate allocation criteria for demand related costs are as follows:

6.2.1 Demand related power purchase costs

The power purchase serves the entire system and further investments are triggered by increase in the peak demand of the system as a whole. Hence, category co-incident peak demand is the appropriate criteria for allocation of such costs. However, due to non-availability of the data with regards to the category co-incident peak, the Average and Excess method as discussed earlier is a suitable alternative.

Table 3– Category Wise Average & Excess Demand (MW)

Categories	Non-Coincident Demand	Average Demand (Sales Plus Losses)/ No. of Hrs in year	Excess Demand
Low Tension			
RGP	1,263	340	923
GLP	35	8	26
Non RGP and LTMD	1,106	201	905
Streetlight (Public Lighting)	25	8	17
Irrigation Agricultural	747	173	573
Public Water Works & Sewerage Pumps (PWW)	77	39	37
Total LT	3,252	770	2,482
High Tension			
Industrial High Voltage (Ind. HT)	1,437	499	938
Industrial High Voltage (Ind. EHT)	-	-	-
Railway Traction	-	-	-
Licensees	-	-	-
Others (incl. Inter-State Sales)	-	-	-
Total HT	1,437	499	938
Total Demand (HT+LT)	4,689	1,269	3,421



Table 4 – Allocation Factors for Demand Related Power Purchase Costs

Categories	Average Demand Component for Allocation (%)	Excess Demand Component for Allocation (%)	Total Allocation Factor (%)
Low Tension			
RGP	16.68%	10.18%	26.86%
GLP	0.40%	0.29%	0.69%
Non RGP and LTMD	9.86%	9.98%	19.84%
Streetlight (Public Lighting)	0.39%	0.19%	0.58%
Irrigation Agricultural	8.52%	6.32%	14.84%
Public Water Works & Sewerage Pumps (PWW)	1.93%	0.41%	2.34%
Total LT	37.79%	27.37%	65.16%
High Tension			
Industrial High Voltage (Ind. HT)	24.49%	10.35%	34.84%
Industrial High Voltage (Ind. EHT)	0.00%	0.00%	0.00%
Railway Traction	0.00%	0.00%	0.00%
Licensees	0.00%	0.00%	0.00%
Others (incl. Inter-State Sales)	0.00%	0.00%	0.00%
Total HT	24.49%	10.35%	34.84%
Total Demand (HT+LT)	62.28%	37.72%	100.00%

6.2.2 Demand related other distribution costs

The distribution network services local maximum demands and investments are triggered by the local (in other words, non-coincident) peaks in demand. Therefore, the category non-coincident peak demand for each class is the most appropriate basis for allocation of demand related other distribution costs.

Table 5 – Allocation factors for Demand Related Other Distribution Costs

Particulars	Allocation Factors
Low Tension	
RGP	26.94%
GLP	0.74%
Non RGP and LTMD	23.58%
Streetlight (Public Lighting)	0.53%
Irrigation Agricultural	15.93%
Public Water Works & Sewerage Pumps (PWW)	1.64%
Total LT	69.35%
High Tension	
Industrial High Voltage (Ind. HT)	30.65%
Industrial High Voltage (Ind. EHT)	0.00%
Railway Traction	0.00%
Licensees	0.00%
Others (incl. Inter-State Sales)	0.00%
Total HT	30.65%



6.2.3 Demand related Total Distribution costs

Allocation factors for demand related total distribution costs is worked out based on weightages of power purchase and other distribution costs. The allocation factors for demand related total distribution costs are as given in below table:

Table 6 – Allocation factors for Demand Related Total Distribution Costs

Sr. No.	Particulars	Demand Related Allocation
	Low Tension	
1	RGP	26.88%
2	GLP	0.70%
3	Non RGP and LTMD	20.74%
4	Streetlight (Public Lighting)	0.57%
5	Irrigation Agricultural	15.10%
6	Public Water Works & Sewerage Pumps (PWW)	2.17%
	Total LT	66.17%
	High Tension	
7	Industrial High Voltage (Ind. HT)	33.83%
8	Industrial High Voltage (Ind. EHT)	0.00%
9	Railway Traction	0.00%
10	Licensees	0.00%
11	Others (incl. Inter-State Sales)	0.00%
	Total HT	33.83%

7 Allocation of Energy Related Costs

Energy related costs are allocated in the ratio of energy consumed by the consumer classes. The energy consumed includes sales to categories and allocated losses.

7.1 Allocation of Losses

Though sales to each of the classes are easily available, allocation of losses requires considerable judgement. The allocation of technical losses is largely dependent upon the voltage at which a consumer category is connected. However, before allocating technical losses, commercial losses are allocated to various categories. The technical losses are then allocated in the ratio of sales plus commercial losses for a category.

7.1.1 Determination of Technical and Commercial Losses

The total distribution loss of MGVL is 9.98% including both technical and commercial losses. The technical losses of MGVL distribution system are estimated to be 5.25%. The HT losses are estimated to be 1.41% and LT losses are 3.84%. The remaining losses are considered as commercial distribution losses. The breakup of the same is as below:

Table 7 – Losses at MGVL

Total Technical Losses	5.25%
EHT	0.00%
HT	1.41%
LT	3.84%
Total Commercial Losses	4.73%
Total Losses in the system	9.98%

7.1.2 Allocation of Commercial Losses

Commercial losses are determined as the difference between total losses and technical losses. The commercial losses are allocated to the consumer categories in ratio of sales.

Table 8 – Allocation of Commercial Losses

Categories	Sales (MU)	Allocation Factor for Commercial Losses	Commercial Losses (MU)
Low Tension			
RGP	2,609	26.08%	137
GLP	63	0.63%	3
Non RGP and LTMD	1,543	15.42%	81
Streetlight (Public Lighting)	61	0.61%	3
Irrigation Agricultural	1,332	13.31%	70
Public Water Works & Sewerage Pumps (PWW)	302	3.02%	16
Total LT	5,910	59.08%	311
High Tension			
Industrial High Voltage (Ind. HT)	4,094	40.92%	215
Industrial High Voltage (Ind. EHT)	-	0.00%	-
Railway Traction	-	0.00%	-
Licensees	-	0.00%	-
Others (incl. Inter-State sales)	-	0.00%	-
Total HT	4,094	40.92%	215
Total	10,004	100.00%	526

7.1.3 Allocation of Technical Losses

Technical losses at HT and LT levels are allocated to the categories in ratio of sales to consumer categories connected at that voltage and energy transferred to the immediate lower voltage level. For instance, if at HT level sale to HT Industry is 20 MU while the sales to other categories at LT level is 5 MU– 20% of the losses at HT level will be allocated to LT Industry category.

The above method for allocation of technical losses is done in two steps. Firstly, the losses are allocated to various voltages levels in the ratio of voltage level sales and transfer (to next category). Then, the losses allocated to various voltage levels are allocated to the respective categories in the ratio of category sales.

Table 9 – Allocation of Technical Losses

	(MU)			
	EHT	HT	LT	
Percent	0.00%	1.41%	3.84%	5.25%
Losses to be allocated	-	157	427	583
LT System				
Sales	-	-	5,910	5,910
Commercial losses	-	-	311	311
Technical losses	-	-	427	427
Input to LT System	-	-	6,647	6,647
Allocation of LT Technical Losses	-	-	427	427
HT System				

	EHT	HT	LT	
Sales	-	4,094	-	4,094
Commercial losses	-	215	-	215
Input to LT System	-	-	6,647	6,647
Input to HT System	-	4,309	6,647	10,957
Technical losses in HT system	-	157	-	157
Allocation of HT Technical Losses	-	62	95	157
EHT System				
Sales	-	-	-	-
Commercial losses	-	-	-	-
Used by HT System	-	4,371	-	4,371
Used by LT System	-	-	6,743	6,743
Input to EHT System	-	4,371	6,743	11,113
Technical losses in EHT system	-	-	-	-
Allocation of EHT Technical Losses	-	-	-	-
Total energy input into the system				11,113
Technical Losses Allocated to Customer Categories	-	62	522	583

Table 10 – Allocation of Losses to Categories

Categories	Sales (MU)	Commercial Losses (MU)	Technical Losses (MU)	Total Energy Input into the system (MU)
Low Tension				
RGP	2,609	137	230	2,977
GLP	63	3	6	72
Non RGP and LTMD	1,543	81	136	1,760
Streetlight (Public Lighting)	61	3	5	70
Irrigation Agricultural	1,332	70	118	1,520
Public Water Works & Sewerage Pumps (PWW)	302	16	27	345
Total LT				
High Tension				
Industrial High Voltage (Ind. HT)	4,094	215	62	4,371
Industrial High Voltage (Ind. EHT)	-	-	-	-
Railway Traction	-	-	-	-
Licensees	-	-	-	-
Others (incl. Inter-State sales)	-	-	-	-
Total HT	4,094	215	62	4,371
Total	10,004	526	583	11,113

7.2 Allocation of Energy Related Costs

Energy related costs are allocated to categories in the ratio of energy consumed. The energy consumed includes not only the sales but also the losses allocated to the respective categories.

Table 11 – Allocation Factors for Energy Related Costs

Particulars	MGVCL Allocation Factors
Low Tension	
RGP	26.78%
GLP	0.64%
Non RGP and LTMD	15.84%
Streetlight (Public Lighting)	0.63%
Irrigation Agricultural	13.67%
Public Water Works & Sewerage Pumps (PWW)	3.10%
Total LT	60.67%
High Tension	
Industrial High Voltage (Ind. HT)	39.33%
Industrial High Voltage (Ind. EHT)	0.00%
Railway Traction	0.00%
Licensees	0.00%
Others (incl. Inter-State Sales)	0.00%
Total HT	39.33%

8 Allocation of Consumer Related Costs

Consumer related costs, primarily, include the costs of providing servicing other than supply of electricity, namely – metering, billing, collection, fault repair etc. These costs, though directly relate to the number of consumers in a particular category, vary significantly with across categories. For instance, the per consumer servicing costs for HT Industrial category will be much higher than that for a Residential category consumer.

8.1 Category Wise Consumer Weightages

To address the variance in per consumer service costs across categories, category wise weightages have been derived to determine allocation factors for consumer-related costs. The weightages are a function of two parameters - Sales per Consumer and Load per Consumer. Category wise parameters have been divided by average of such parameter for arrive at a ratio. The minimum & maximum limit for such ratios has been set at 1 and 200 respectively. The average of these two ratios for each category gives the 'Category Wise Consumer Weightage'.

Table 12 – Category Wise Consumer Weightage

Categories	Connected Load	Consumers	Sales	Weight (sales/ consumer)	Weight (load/ consumer)	Average Weight
Domestic	2,733	26,30,978	2,609	1	1	1
Commercial	75	24,554	63	1	1	1
Industrial Low & Medium Voltage (Ind. LT)	1,480	3,17,951	1,543	2	2	2
Streetlight (Public Lighting)	25	8,206	61	2	1	2
Irrigation Agricultural	1,085	1,65,792	1,332	3	3	3
Public Water Works & Sewerage Pumps (PWW)	166	22,228	302	4	3	4
Industrial High Voltage (Ind. HT)	1,437	2,222	4,094	200	200	200
Industrial High Voltage (Ind. EHT)	-	-	-	1	1	1
Railway Traction	-	-	-	1	1	1
Licensees	-	-	-	1	1	1
Total	7,001	31,71,931	10,004			

8.2 Allocation of Consumer Related Costs

Consumer related as arrived at after Classification of Distribution Cost is allocated as per the weightages derived.

Table 13 – Allocation Factors for Consumer Related Costs

Particulars	Allocation Factors
Low Tension	
RGP	62.02%
GLP	0.69%
Non RGP and LTMD	13.67%

Particulars	Allocation Factors
Streetlight (Public Lighting)	0.36%
Irrigation Agricultural	10.77%
Public Water Works & Sewage Pumps (PWW)	2.02%
	0.00%
Total LT	89.52%
High Tension	
Industrial High Voltage (Ind. HT)	10.48%
Industrial High Voltage (Ind. EHT)	0.00%
Railway Traction	0.00%
Licensees	0.00%
Others (incl. Inter-State Sales)	0.00%
Total HT	10.48%

9 Computation of category wise Cost of Service

The cost of service each category has 3 elements, namely –

1. Demand Related Costs;
2. Energy Related Costs;and
3. Consumer Related Costs;

Table 14 – Category Wise Total Cost of Service

Particulars	MGVCL			
	Demand Related	Energy Related	Customer Related	Total
Low Tension				
RGP	625	960	187	1,772
GLP	16	23	2	41
Non RGP and LTMD	482	568	41	1,091
Streetlight (Public Lighting)	13	23	1	37
Irrigation Agricultural	351	490	32	874
Public Water Works & Sewerage Pumps (PWW)	51	111	6	168
Total LT	1,538	2,175	270	3,982
High Tension				
Industrial High Voltage (Ind. HT)	786	1,410	32	2,228
Industrial High Voltage (Ind. EHT)	-	-	-	-
Railway Traction	-	-	-	-
Licensees	-	-	-	-
Others (incl. Inter-State Sales)	-	-	-	-
Total HT	786	1,410	32	2,228
Total Costs (HT+LT)	2,324	3,585	301	6,210

The above provides the total cost of service of each category. Per unit (energy, demand or consumer as unit) cost of service for each category is derived as under.

Table 15 – Category Wise per Unit Cost of Service

Particulars	MGVCL			
	Demand Related (Rs/kWh)	Energy Related (Rs/kWh)	Customer Related (Rs/kWh)	Total Cost (Rs/kWh)
Low Tension				
RGP	2.39	3.68	0.72	6.79
GLP	2.60	3.68	0.33	6.61
Non RGP and LTMD	3.12	3.68	0.27	7.07
Streetlight (Public Lighting)	2.14	3.68	0.18	6.00
Irrigation Agricultural	2.63	3.68	0.24	6.56
Public Water Works & Sewerage Pumps (PWW)	1.67	3.68	0.20	5.55
Total LT	2.60	3.68	0.46	6.74
High Tension				
Industrial High Voltage (Ind. HT)	1.92	3.44	0.08	5.44
Industrial High Voltage (Ind. EHT)	-	-	-	-
Railway Traction	-	-	-	-
Licensees	-	-	-	-
Others (incl. Inter-State Sales)	-	-	-	-
Total HT	1.92	3.44	0.08	5.44
Total Costs (HT+LT)	2.32	3.58	0.30	6.21


10 Conclusion

The cost of service study seeks to establish the adequacy of tariffs, category wise cross subsidy in the system and provide a path for elimination of the same. The results of the study also establish the cross-subsidy surcharge applicable to open access consumers. The table below compares the cost of service and average realization. The average realization is worked out by dividing the sum of category wise revenue from sale of Power and Non-tariff Income (apportioned category wise based on its sales) by the category wise sales. The Agriculture subsidy is also added to the revenue while working out Average realization for Agriculture category.

Table 16 – Cost of Service against Average Realization

Particulars	Cost of Service (Rs/kWh)	Average Realisation (Rs/kWh)	Gap (Rs/kWh)	Gap %
Low Tension				
RGP	6.79	5.45	1.34	25%
GLP	6.61	6.03	0.59	10%
Non RGP and LTMD	7.07	7.20	(0.13)	-2%
Streetlight (Public Lighting)	6.00	5.84	0.16	3%
Irrigation Agricultural	6.56	3.76	2.80	75%
Public Water Works & Sewerage Pumps (PWW)	5.55	5.28	0.28	5%
High Tension				
Industrial High Voltage (Ind. HT)	5.44	6.95	(1.50)	-22%
Industrial High Voltage (Ind. EHT)	-	-	-	-
Railway Traction	-	-	-	0%
Licensees	-	-	-	-
TOTAL	6.21	6.11	0.10	2%

The graph below shows category-wise cost of service and average realization of MGVCL for FY 2018-19.

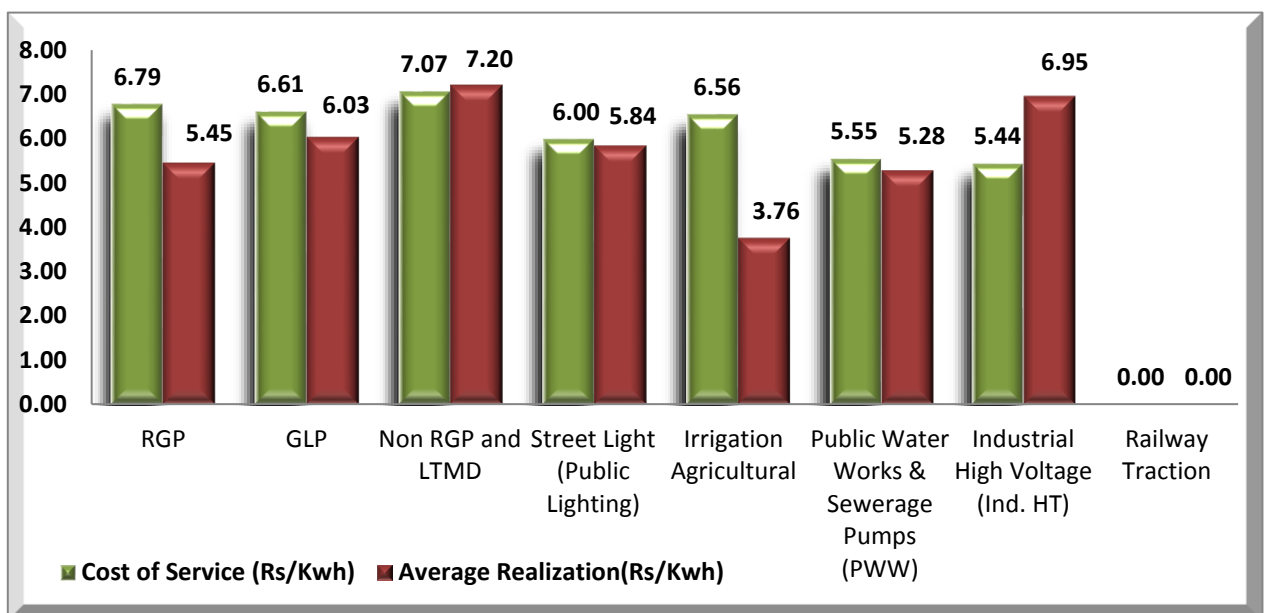

11 Annexure 1– Category Wise Diversity Factors

Diversity factor is the ratio of peak demand to connected/contracted load. An assessment of category wise diversity factors was made using a sample of feeders that predominantly serve a particular category. The feeders considered for arriving at diversity factors were selected from all circles of MGVCL for RGP, LT Industrial, Public Water Works and Agricultural categories. For street lighting, diversity factor of 100% has been taken. For GLP category, the diversity factor has been taken to be the same as that for RGP Category. Further, where two types of feeders for the same category have been considered – Residential Rural and Residential Urban, for instance – weighted average of the same has been considered. For HT categories, namely – HT and Traction diversity factor is considered as 100%.

Table 17 – Sample Diversity Factors for LT Categories

Type	Connected Load (KVA)	Max Load (KVA)	Diversity Factor (%)
Industrial	102446	58930	57.52%
Irrigation Agriculture	108872	74915	68.81%
JGY	125863	60835	48.33%
Residential – Urban	249929	112867	45.16%
HT -EXP	113910	102712	90.17%

12 Annexure 2– Category Wise Non-Coincident Demand

The diversity factors derived from the sample of feeders and from available records are then applied to the total connected load of the respective categories to arrive the non-coincident peak.

Table 18 – Category Wise Non-Coincident Demand

Categories	Connected Load (MW)	Diversity Factor (%)	Non-Coincident Peak Demand
Low Tension			
RGP	2,733	46.22%	1,263
GLP	75	46.22%	35
Non RGP and LTMD	1,480	74.71%	1,106
Streetlight (Public Lighting)	25	100.00%	25
Irrigation Agricultural	1,085	68.81%	747
Public Water Works & Sewerage Pumps (PWW)	166	46.22%	77
Total LT	5,564	0.00%	3,252
High Tension			
Industrial High Voltage (Ind. HT)	1,437	100.00%	1,437
Industrial High Voltage (Ind. EHT)	-	100.00%	-
Railway Traction	-	100.00%	-
Licensees	-	100.00%	-
Others (incl. Inter-State Sales)	-	0.00%	-
Total HT	1,437	0.00%	1,437
Total Connected Load (HT+LT)	7,001	0.00%	4,689

13 Annexure 3 – Cost of Service (+/- 20%) for FY 2018-19

Table 19 – Cost of Service (+/- 20%) for FY 2018-19

Particulars	Cost of Service (Rs/kWh)	Average Realisation (Rs/kWh)	(+20%) of COS (Rs./kWh)	(-20%) of COS (Rs./kWh)
Low Tension				
RGP	6.79	5.45	8.15	5.43
GLP	6.61	6.03	7.94	5.29
Non RGP and LTMD	7.07	7.20	8.49	5.66
Streetlight (Public Lighting)	6.00	5.84	7.20	4.80
Irrigation Agricultural	6.56	3.76	7.87	5.25
Public Water Works & Sewerage Pumps (PWW)	5.55	5.28	6.66	4.44
High Tension				
Industrial High Voltage (Ind. HT)	5.44	6.95	6.53	4.35
Industrial High Voltage (Ind. EHT)	-	-	-	-
Railway Traction	-	-	-	-
Licensees				
TOTAL	6.21	6.11	7.45	4.97